




# 3M™ 8833 Dust/Mist/Metal Fume Respirator Fitting Instructions

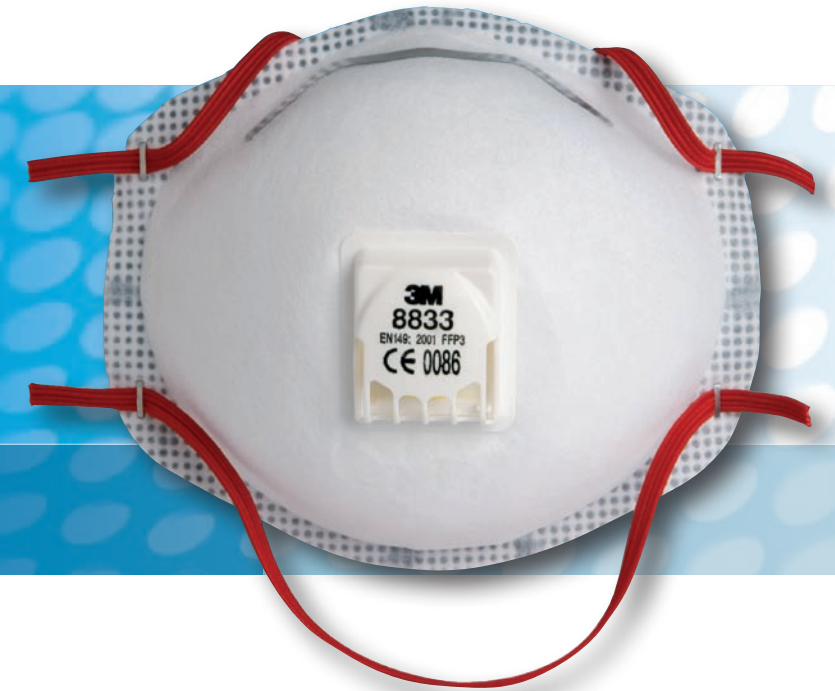

## 3M 8833 Dust/Mist/Metal Fume Respirator

Standard: EN149:2001

Type: FFP3


Maximum Usage Levels:

20 x Workplace Exposure Limit (WEL)



Approval: CE marked

This respirator should not be used in oxygen deficient environments, for escape purposes, by people with beards or facial hair or in atmospheres where concentrations of contaminant may exceed that deemed Immediately Dangerous to Life or Health (IDLH).

Lightweight, comfortable respirator which carries the highest filtering half-mask performance rating of FFP3. It can be used in most industrial applications where high level protection against solids and water or oil based mists is required. The 3M Cool Flow valve allows for lower breathing resistance. The soft face seal gives an improved fit and wearer comfort.



1. Cup the respirator in your hand with the nosepiece at your fingertips, allowing the headbands to hang freely below your hand.
2. Position the respirator under your chin with the nosepiece up.
3. Pull the top strap over your head resting it high at the top back of your head. Pull the bottom strap over your head and position it around the neck below the ears.



4. Place the fingertips of both hands at the top of the metal nosepiece. Mould the nosepiece to the shape of your nose by

pushing inwards while moving your fingertips down both sides of the nosepiece. Pinching the nosepiece using only one hand may result in less effective respirator performance.

5. The seal of the respirator on the face should be fit-checked prior to wearing in the work area.

a) Cover the front of the respirator with both hands being careful not to disturb the position of the respirator.

b) Inhale sharply. If air flows around the nose, readjust the nosepiece as described in step 4. If air leaks at the respirator edge work the straps along the sides of the head. If you CAN NOT achieve a proper fit DO NOT enter the contaminated area. See your supervisor.

